: EVER VRE.	EV9100-66 IN-6 CG-S In-lin	e Filter
Designed for great taste and odor	reduction	
		BENEFITS
<image/> <image/> <image/> <image/> <image/> <image/> <image/> <image/> <image/> <section-header><image/><image/><section-header><section-header><section-header><section-header><section-header><section-header><section-header><section-header><section-header><section-header></section-header></section-header></section-header></section-header></section-header></section-header></section-header></section-header></section-header></section-header></section-header>	NH-6 CG-S: EV9100-66	 Provides clear, fresh, quality ingredient water for coffee, and ice applications Granular activated carbon reduces chlorine taste and odor, which can cause coffee to taste bitter Inhibits the formation of limescale, which can shorten the life of equipment 6" in - line design is compact and installs out of sight behind equipment
INSTALLATION TIPS	OPERATION TIPS	A P P L I C A T I O N / S I Z I N G
Use 1/4" water line Flush IN-6 CG-S by running water through filter for three minutes at full flow	Change cartridges on a regular 6 month preventative maintenance program Change cartridges when capacity is reached or when pressure falls below 10 psi Service flow rate must not exceed 0.75 gpm Always flush the filter cartridge at time of installation and cartridge change	For low volume, single pot coffee brewers with flow rates up to 0.75 gpm Capacity: 700 gallons

IN-6 CG-S In-line Filter

S P E C I F I C A T I O N S

Overall Dimensions:

Length: 6"

Diameter: 2.0"

Inlet connection: 1/4"

Outlet connection: 1/4"

Capacity: 700 gallons

Service Flow Rate: Maximum 0.75 gpm (2.8 Lpm)


Pressure Requirements: 10 - 125 psi (0.7 – 8.6 bar), non-shock

Temperature: 35 - 100°F (2 - 38°C)

Operating Weight: 1.0 lbs.

No electrical connection required

The contaminants or other substances removed or reduced by this drinking water system are not necessarily in your water. Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system. Systems certified for cyst reduction may be used with disinfected water that may contain filterable cysts.

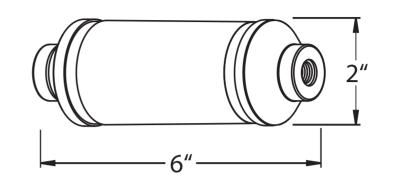

WARRANTY

Everpure water treatment systems (excluding replaceable elements) are covered by a limited warranty against defects in material and workmanship for a period of five years after date of purchase. Everpure replaceable elements (filter cartridges and water treatment cartridges) are covered by a limited warranty against defects in material and workmanship for a period of one year after date of purchase. See printed warranty for details. Everpure will provide a copy of the warranty upon request.



EVERPURE, LLC 1040 Muirfield Drive Hanover Park, Illinois 60133 Toll Free (800) 323-7873 Tel (630) 307-3030 Fax (630) 307-3030 http://www.everpure.com In Europe: N.V. EVERPURE (EUROPE) S.A. Industriepark Wolfstee Toekomstlaan 30 B-2200 Herentals Belgium Tel 32 -14-283500 Fax 32-14-283505

In Japan: EVERPURE JAPAN LLC Hashimoto MN Bldg. 7F 3-25-1 Hashimoto Sagamihara-Shii Kanagawa 229-1103 Japan Tel 81-(0)42-775-3011 Fax 81-(0)42-775-3015

Everpure, LLC 1040 Muirfield Drive Hanover Park, IL 60133 Ph: 630-307-3000 Fax: 630-307-3030